




YANMAR CO., LTD.
YANMAR AMERICA CORP.

Item	Lev.	O	Part No.	Description	Quantity	Remarks
1	-		119749-08100	Foot, Engine Mounting	2	
2	-	X		Plain Washer, 10mm	8	(A)
3	-	X		Helical Spring Lock Washer, 10mm	8	(A)
4	-		26106-100202	M10-1.50 x 25 Hex Cap Bolt	8	

 ##

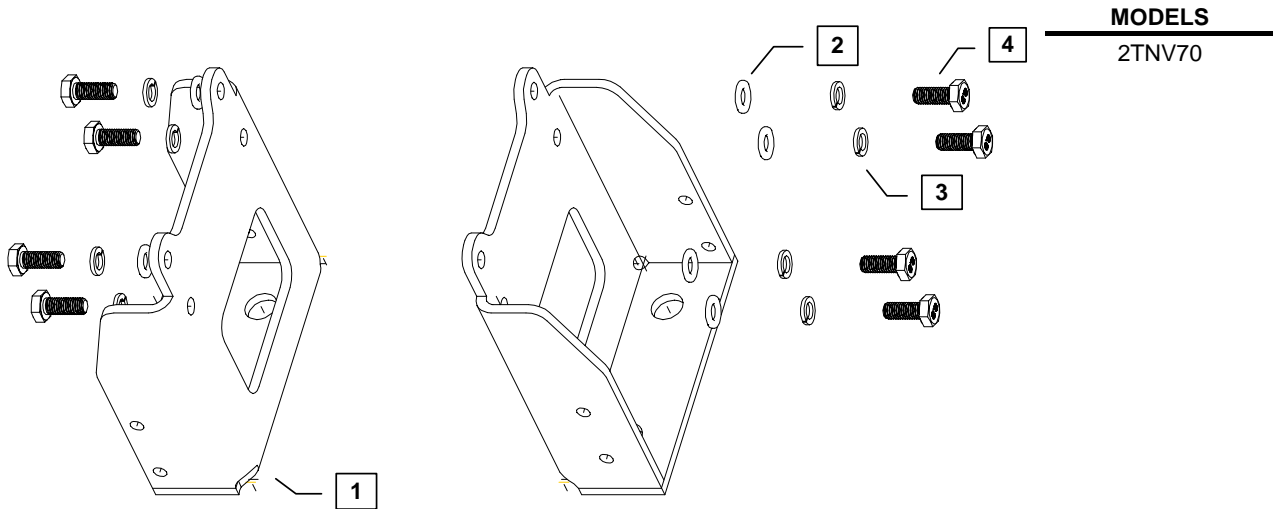

Remarks: (A) 26106-100202 is a service part used to replace the bolt, lock washer and washer assembly (items: 2, 3 and 4).



Installation Instructions

Hand tighten all bolts and nuts until assembly is completed, then torque according to specifications in Table 1. The numbers in () represent the item numbers.

1. Install Engine Mounting Feet (1) to engine mounting pads using Washer (2), Lock Washer (3) and M10 x 25 bolt (4) provided in kit. Bolts used to mount shipped engines are the same size but not long enough and should not be used.

NOTE: Comply with torque standards in the table to avoid unexpected damage during installation or in the future.

Diameter x Pitch	Kgf-m	Foot-lbf	N-m
M10 x 1.50	4.5 ~ 5.5	32.5 ~ 39.8	44.0 ~ 54.0